
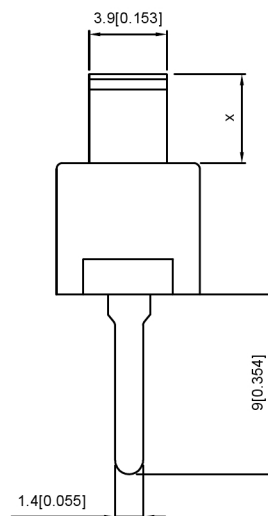


Specification:

- 1.Rating:6A 120VAC
- 2.Contact resistance: $\leq 30 \text{ m}\Omega$
- 3.Insulation resistance: $\geq 100 \text{ M}\Omega$ (DC500V/Min)
- 4.Electronics life: > 10000 cycles
- 5.Operation force: $250 \pm 100 \text{ gf}$

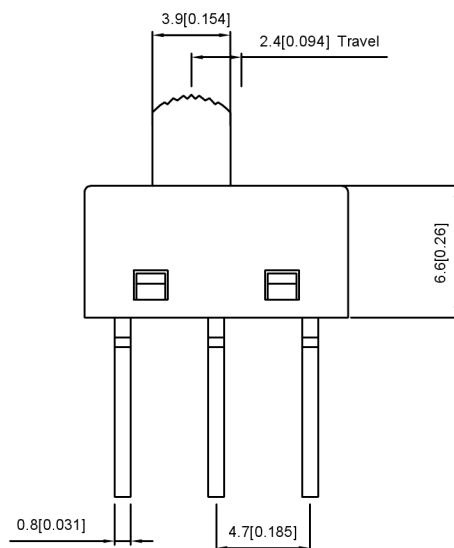

SS-12M10 X X

Knob Type	H(mm)
L	2~12
G	

Function		
ON	NA	ON
	/	

7	Terminal	1	Phosphor bronze	Plating silvering
6	Bridge piece	1	Phosphor bronze	Plating silvering
5	Spring	1	carbon steel	
4	Rotor	1	Iron sleeve	NI
3	Base	1	PA46	
2	Shell	1	PA46	
1	Keystake	1	PA66	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGULAR				$\pm 5^\circ$
$L \leq 4$				± 0.2
$4 < L \leq 16$				± 0.3
$16 < L \leq 63$				± 0.4
$L > 63$				± 0.5

XKB

DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	SLIDE SWITCH
CHKD	UNIT: mm/in	PART NO.:
APPD	SIZE: A4	SS-12M10XX
		DWG NO.:
		WEIGHT
		SHEET
		REVISIC
		1/1
		A0

XKB INDUSTRIAL PRECISION CO.,LIMITED

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn