

承 认 书

REV: A

SPECIFICATION FOR APPROVAL

客 户
CUSTOMER

华秋

品 名
DESCRIPTION

T1495-20mHMIN/立式/分边绕/上隔/板点胶

料 号
PART NO.

ET1495-203G-DL-P6-0.5-2

日 期
DATE.

2023-05-25

确认后请签名，并返回一份！

承制方	核 准	确 认	制 表
	姚阳	黄丽	唐玲华

承认方	全 部 承 认	部 分 承 认	修 订 承 认

东莞市颐特电子有限公司

ET Electronic Co.,Ltd.

地址：东莞市厚街镇下汴村富民路 12 号万卓 1602

ADDRESS:Xia bian Baida Industrial Park,Houjie Town Donguan City

TEL: 0769-82053495

FAX:0769-82053496


E-mail:sunzhiwen@126.com

SPECIFICATION FOR APPROVAL

1 OF 3

CUSTOMER	华秋	PART NO	ET1495-203G-DL-P6-0.5-2	DATE	2023-5-25
----------	----	---------	-------------------------	------	-----------

1.CONFIGURATION DIMENSIONS (UNIT: mm)

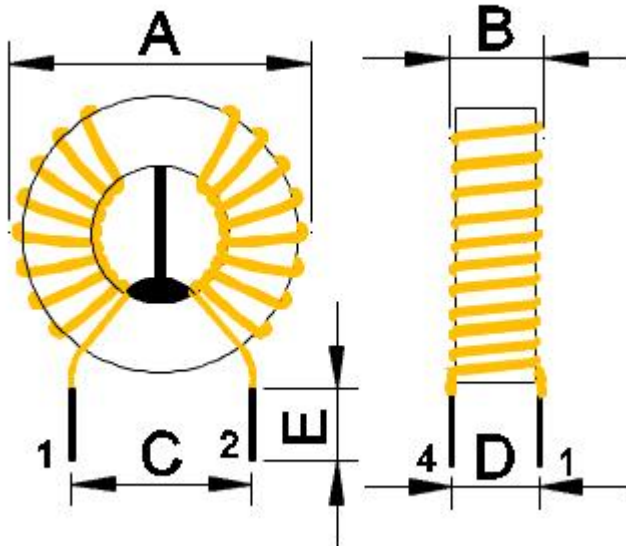

备注： 以上尺寸单位均为(mm)

A	17.0MAX
B	10 MAX
C	5.0REF
D	5.0REF
E	6.0±1

2.ELECTRIC CHARACTERISTICS:

NO.	Parameter		Specification	Conditions	Test instruments
1	Ls	(1-4) = (2-3)	20mH MIN	1KHz/0.25V	LCR 6377
2	Hi-pot	(1-4):(2-3)	3S	1.0KVAC/2mA	CC2670A


核准 APPROVED BY	确认 CHECKED BY	制表 DRAWN BY
姚阳	黄丽	唐玲华

SPECIFICATION FOR APPROVAL

20F 3

CUSTOMER	华秋	PART NO	ET1495-203G-DL-P6-0.5-2	DATE	2023-5-25
----------	----	---------	-------------------------	------	-----------

3.WINDING SPECIFICATION:

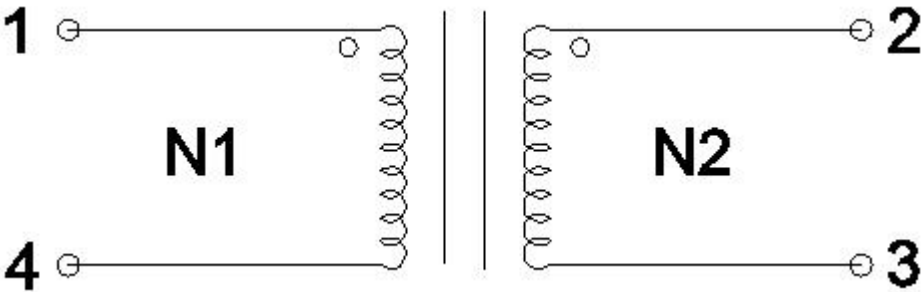

NO.	Winding	Terminal	Wire	Turns	Remark
1	N1	1-4	2UEW 0.5mm*1P	46(REF)	分边绕
2	N2	2-3	2UEW 0.5mm*1P	46(REF)	

4.MATERIAL LIST:

NO	DESCRIPTION	MATERIAL	MANUFACTURER	U.L NO
1	CORE	T1495 锰锌 R13K	FUSIYUAN ELECTRIC CO.,LTD	
2				
3	WIRE	WIRE TYPE UEW-2 130℃	XI LONG ELECTRIC CO.,LTD	
4	SOLDER	G107H Sm99.7Cu0.3	QIAN DAO ELECTRIC CO.,LTD	

核准 APPROVED BY	确认 CHECKED BY	制表 DRAWN BY
姚阳	黄丽	唐玲华

SPECIFICATION FOR APPROVAL

3 OF 3

CUSTOMER	华秋	PART NO	ET1495-203G-DL-P 6-0.5-2	DATE	2023-5-25				
Test report									
SPEC	ELECTRICAL CHARACTERISTIC			MECHANICAL DIMENSIONS					
	L1 1-4	L2 2-3	Hi-pot	A	B	C	D	E	F
	mH	mH	1.0KVAC	mm	mm	mm	mm	mm	mm
	20	1	2mA						
	MIN	MIN	3S						
1	29.2	29.0	OK						
2	28.7	28.4	OK						
3	30.3	30.0	OK						
4	28.1	28.5	OK						
5	30.2	30.1	OK						
6									
7									
8									
9									
10									
Ambient Temperature:25℃ Humidity:70%									
Characteristics:									
1.Current rating :Based on temperature rise not exceed 20℃									
2.Operating temperature : -20℃ to 80℃.									
核准 APPROVED BY		确认 CHECKED BY		制表 DRAWN BY					
姚阳		黄丽		唐玲华					