

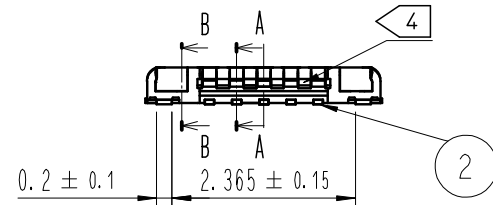



Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

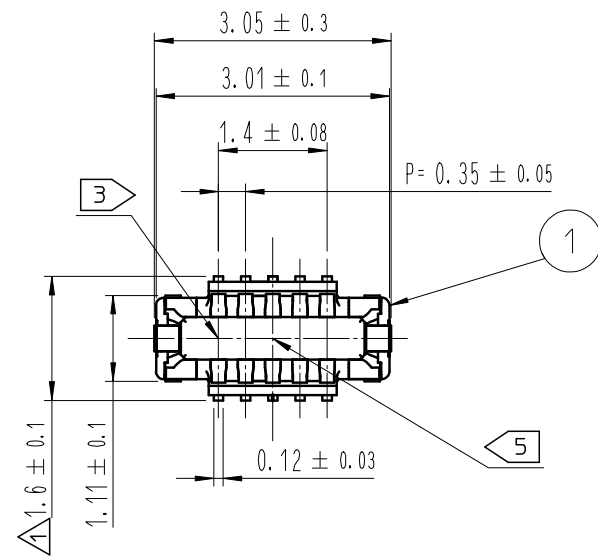

A-A (30:1)

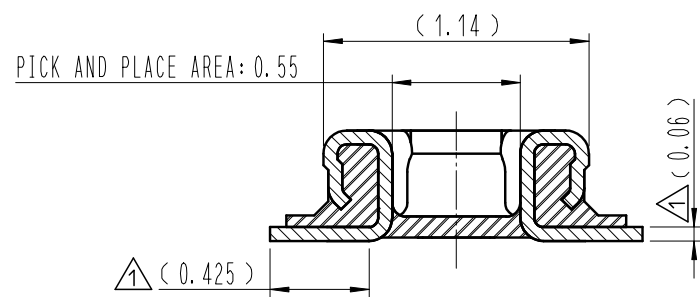


B-B (30:1)

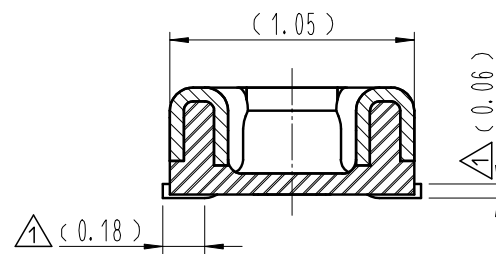


- NOTE
- 1. ALL LEAD CO-PLANARITY SHALL BE 0.08mm MAX.
 - 2. CONTACT PLATING SPECIFICATIONS
CONTACT AREA : GOLD 0.05 μ m MIN
SMT LEAD : GOLD 0.05 μ m MIN
UNDERPLATING : NICKEL 1 μ m MIN
(SURFACE : SEALING)
 - 3. CAV NO. ARE INDICATED IN APPROX POSITION SHOWN.
 - 4. A PART OF THE WALL COULD BE NOTCHED
 - 5. DENT EXISTS IN THE INDICATED AREA FOR MANUFACTURING CONVENIENCE.

	COUNT	DESCRIPTION OF REVISIONS	B	Y	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	B	Y	CHKD	DATE
	9	RE-6-1980	PSH	JHW		20.09.01							
	2	RE-6-2032	PSH	JHW		20.10.13							

ENGAGEMENT FIGURE (50:1)

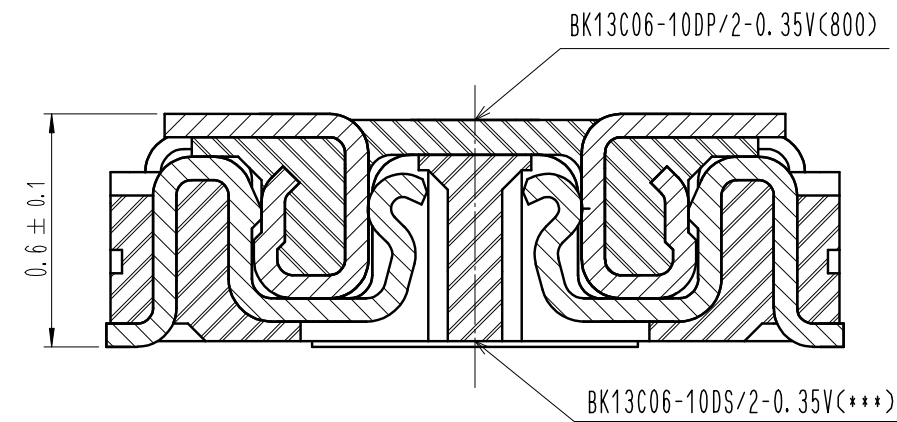

SIGNAL CONTACT

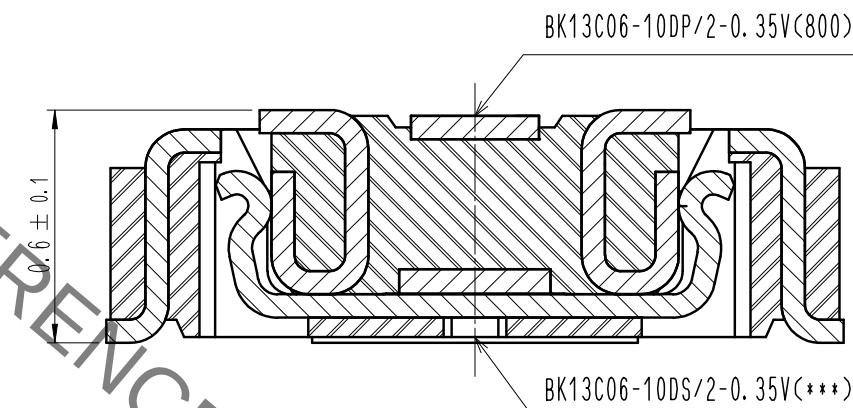


POWER CONTACT

4	PS	CLEAR (EMBOSSED CARRIER TAPE)			
3	COPPER ALLOY				
2	COPPER ALLOY		6	PS	BLACK (PLASTIC REEL)
1	LCP	UL94 V-0, BLACK	5	POLYESTER	CLEAR (COVER TAPE)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
REMARKS			DRAWN	DESIGNED	CHECKED
			S. H. PARK	S. H. PARK	H. W. JO
			20. 01. 20	20. 01. 20	20. 01. 20
				APPROVED	RELEASED
				H. W. JO	20. 09. 01
CODE NO. (OLD)		DRAWING NO.	PART NO.		
	SCALE	EDC3-633003-80	BK13C06-10DP/2-0.35V(800)		
	UNITS	HIROSE KOREA CO., LTD.	CODE NO		
	mm		CL 6665-0034-7-800		
					1/3


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

7 RECOMMENDED PCB LAYOUT

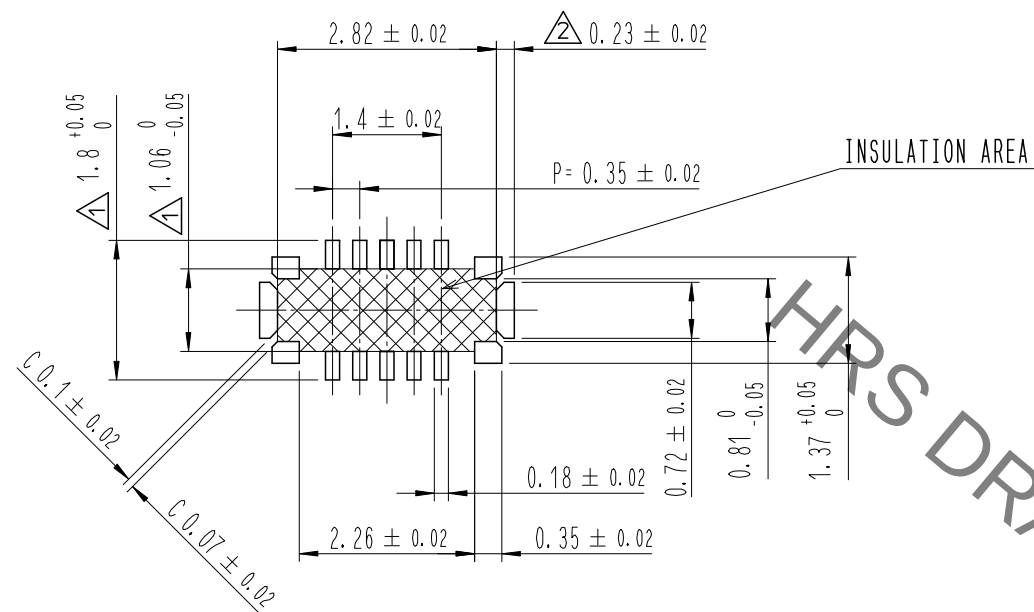


RECOMMENDED METAL MASK DIMENSIONS

METAL MASK THICKNESS : 80 μm

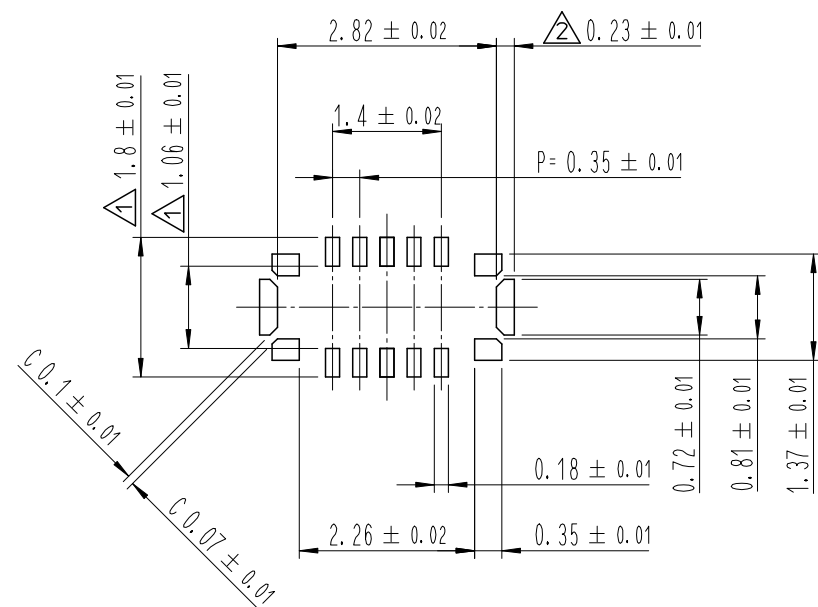

6 RECOMMENDED REFLOW TEMPERATURE PROFILE USING LEAD-FREE SOLDER PASTE.

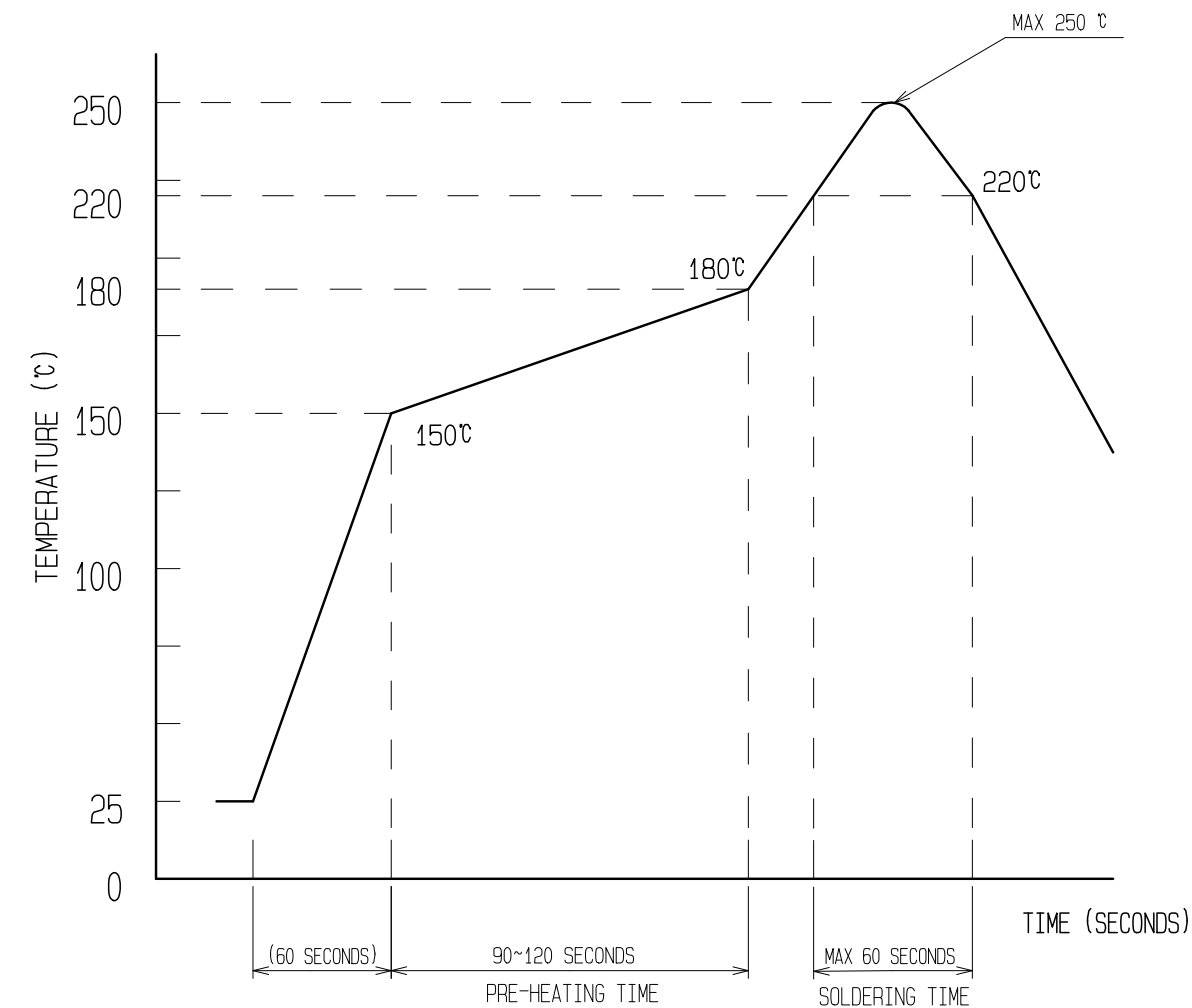


REFLOW METHOD : N₂ REFLOW
NUMBER OF REFLOW CYCLES : 2 CYCLES MAX.
1) REFLOW TIME
DURATION ABOVE 220°C, 60 SEC MAX.
(PEAK TEMPERATURE : 250°C MAX)
2) PRE-HEAT TIME
PRE-HEAT TEMPERATURE(MIN): 150°C
PRE-HEAT TEMPERATURE(MAX): 180°C
PRE-HEAT TIME: 90-120 SEC.


- 6 THIS TEMPERATURE PROFILE IS PER THE CONDITIONS SHOWN ABOVE. ADDITIONAL FACTORS SUCH AS SOLDER PASTE TYPE, PCB SIZE AND OTHER MOUNTED COMPONENTS COULD AFFECT THE PROFILE. THEREFORE, A THOROUGH EVALUATION OF MOUNTING CONDITION IS REQUIRED PRIOR TO PRODUCTION. TEMPERATURE IS MEASURED AT CONTACT LEAD.
- 7 PLEASE CONTACT US IN CASE YOU WILL MAKE DIFFERENT SETTINGS FROM OUR RECOMMENDATION.
- 8 . THIS PRODUCT SATISFIES HALOGEN FREE REQUIREMENTS DEFINED AS 900ppm MAXIMUM CHLORINE, 900ppm MAXIMUM BROMINE, AND 1500ppm MAXIMUM TOTAL OF CHLORINE AND BROMINE.
- 9 . THIS PRODUCT COMPLY WITH RoHS.

DRAWING NO.	EDC3-633003-80	PART NO.	BK13C06-10DP/2-0.35V(800)
SCALE	10:1	CODE NO	CL 6665-0034-7-800
UNITS	mm		


EMBOSSED CARRIER TAPE PACKAGING (5:1)

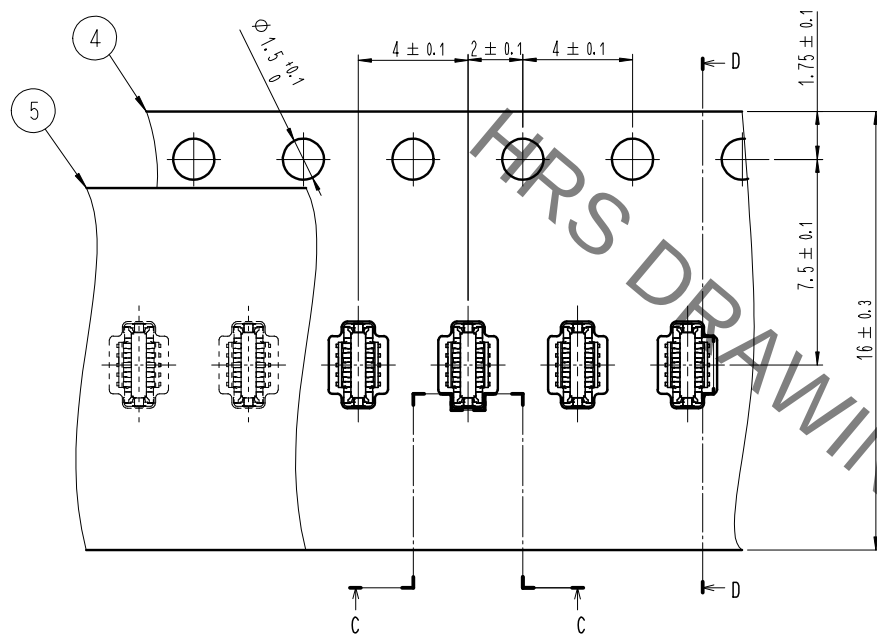


D-D (5:1)

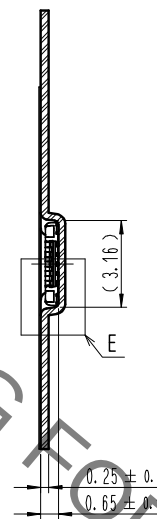

C-C (5:1)



DIRECTION OF UNREELING

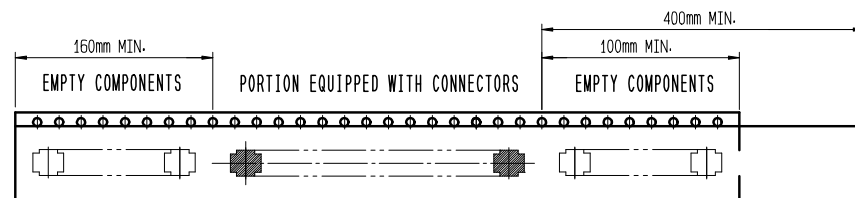


TRAILER

LEADER

TAPING(FREE)


STYLE AND DIMENSION OF REEL (FREE)

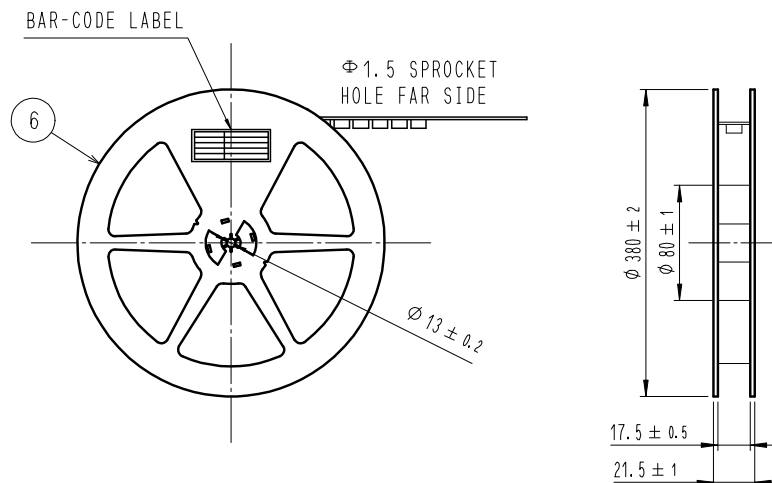

DETAIL OF PART No. LABEL

SUPPLIER	QUANTITY	PART NO.	CODE NO.	DATE OF MANUFACTURED
生産月日	年	月	日	
図番	**	**	**	
品名	BK13C06-10DP/2-0.35V(800)			
納入数量	20,000個			
納入者	HIROSE KOREA			

E (10:1)



10 . PER REEL 20,000 CONNECTORS.

11 . THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

12 REF. TO JIS C 0806, IEC-60286-3 (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)

DRAWING NO.	EDC3-633003-80	PART NO.	BK13C06-10DP/2-0.35V(800)
SCALE	10:1	CODE NO	CL 6665-0034-7-800
UNITS	mm		
HRS HIROSE KOREA CO., LTD.			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[BK13C06-10DP/2-0.35V\(800\)](#)