

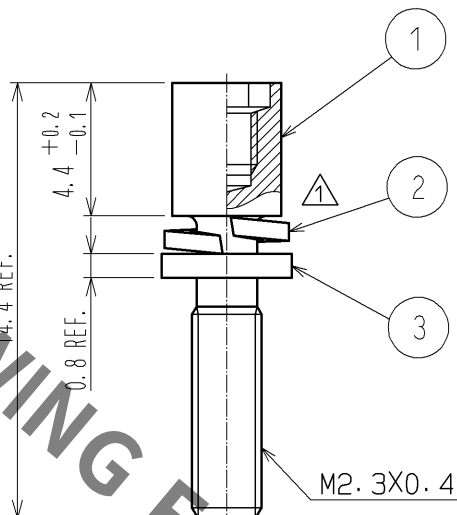


HRS DRAWING FOR REFERENCE

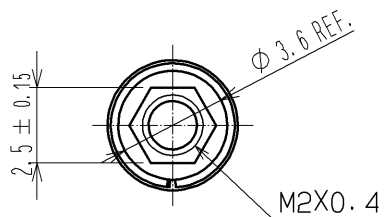

- NOTE 1 THIS PRODUCT IS ASSEMBLED TO A 'DH60-**P'.
THE APPLICABLE PANEL THICKNESS IS FROM 0.5 TO 0.8mm.
2 THIS PRODUCT IS PACKED IN A BAG. (QUANTITY IN A BAG : 200 pcs.)

1 ASSEMBLED(1:1)

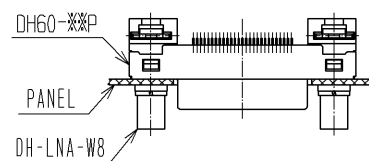

1	STEEL	OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN	3	STEEL	OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 4 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-E-003059	DESIGNED MO. SHIMOYAMA
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : AO. SUZUKI 09. 04. 27	DRAWING NO. EDC4-126529-00		
		CHECKED : MO. SHIMOYAMA 09. 04. 24	PART NO. DH-LNA-W8		
		DESIGNED : TS. ITO 09. 04. 24	CODE NO. CL244-0004-2-00		
		DRAWN : TS. ITO 09. 04. 24	1/1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DH-LNA-W8](#)