
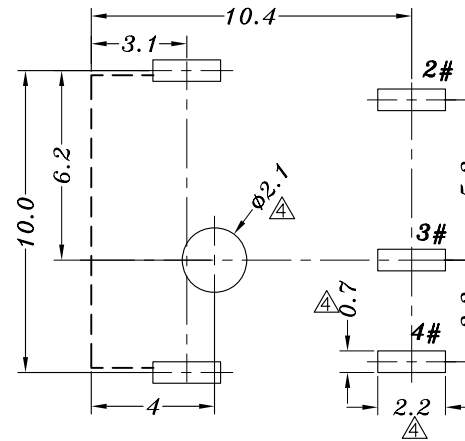
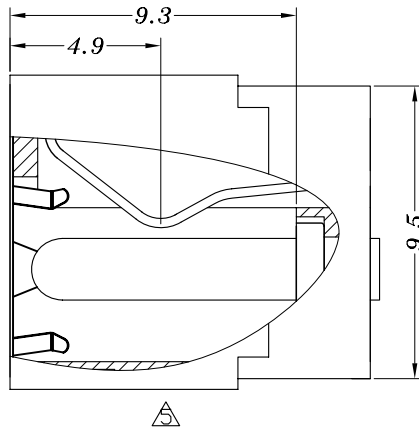
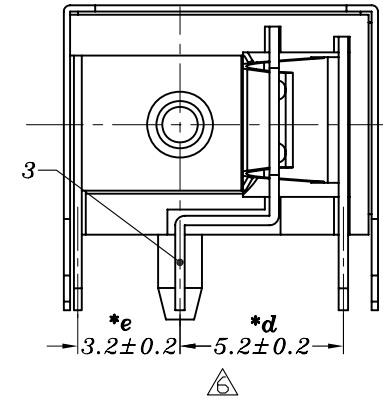
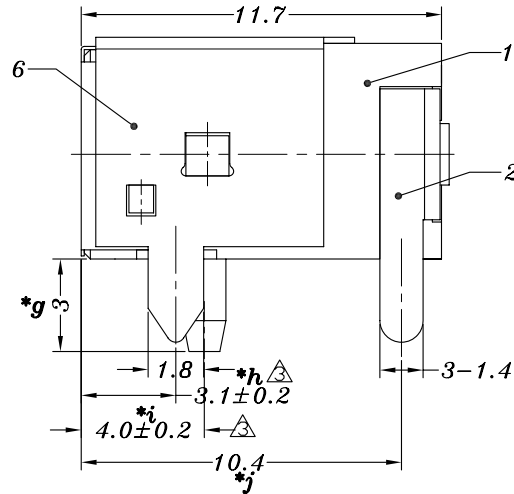


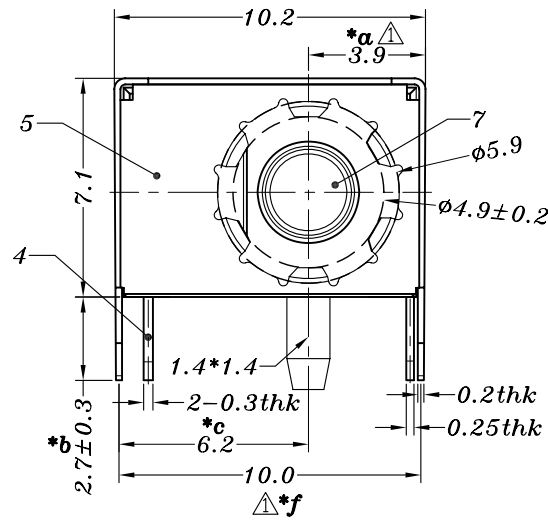

P.C.B LAYOUT

DC044A		DC044A-2	
	4		4
	3		3
	2		2
SCHEMATIC		SCHEMATIC	
PIN	φ1.65	PIN	φ2
APPD		APPD	

Specification:

1. Rating : DC 30V 0.5A.
2. Contact resistance: $\leq 70\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (250VDC).
4. Withstanding voltage: 250VAC.
5. Insertion and extraction force: 3N~30N.
6. life test: 5000cycles min.
7. Operation temperature range: $-25^{\circ}\text{C} \sim 70^{\circ}\text{C}$.

B1	2020.7.01	Δ 新增视图及产品技术规格	GYW	
A5	2019.8.30	Δ 新增产品局部剖视图	GYW	
A4	2018.12.24	Δ 新增PCB板开孔尺寸标注	GYW	
A3	2018.12.07	Δ 修改“h”“i”尺寸公差为±0.2	GYW	
A2	2018.11.12	Δ 修改BOM信息: 改用DC044B前盖无镀	GYW	
A1	2018.4.13	Δ 盖脚尺寸9.8改为10.0	GYW	
A0	2013.8.29	初版	LIU	
NO	DATE	REVISIONS	BY	APPD

					TOLERANCE UNLESS SPECIFIED		A2	2018.11.12	修改BOM信息：改用DC044B前盖无镀		GYW			
7	DC044 PING	BRASS	1	Ni PLATED			A1	2018.4.13	盖脚尺寸9.8改为10.0		GYW			
6	DC044A COAT	SUS	1	Ni PLATED	UP TO 5mm:±0.1	ANGULAR ±1°	A0	2013.8.29	初 版		LIU			
5	DC044B COVER 	SUS	1	WASH 	ABOVE 5mm:±0.2		NO	DATE	REVISIONS		BY	APPD		
4	DC044 2#SPRING	SUS/PBS	1	Ag PLATED	TITLE:DC JACK			UNIT : MM		ROHS COMPLIANT	DWN			
3	DC044 3#CURVE PIECE	BRASS	1	Ag PLATED	MODEL:DC-044A			SCALE: 5:1			CHK'D			
2	DC044 4#FLAT PIECE	BRASS	1	Ag PLATED	 HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司							APPD		
1	DC044A CASE	PBT/PA9T	1	BLACK										
NO.	PART NAME	MATERIAL	QTY	FINISHING								PRO.AGL:	 	REV :B1