


Panel cut-outs

Panel cut-out

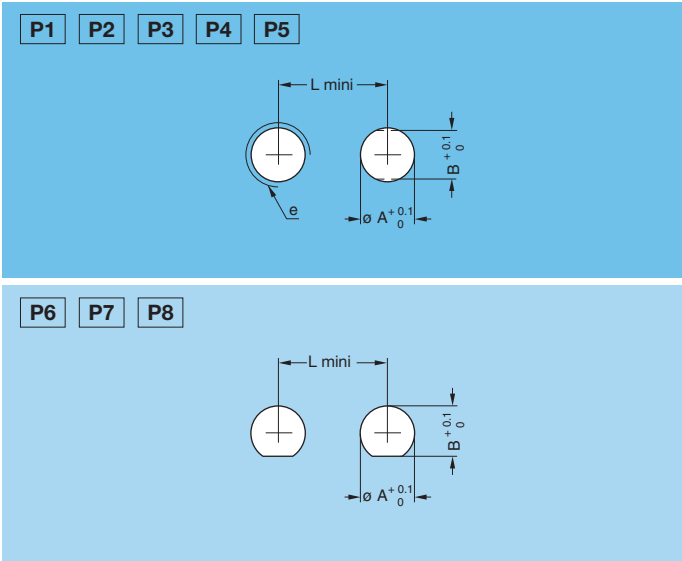

Cut-out	Model	Dimensions			
		A	B	L	e
P1	ECP-EPE-EPR-EPS-ERC EWF-EXG-FAB-HGP HGW-SWH-VPS-XBG XSG-XRG	7.1	–	14.5	–
P2	EWV	–	–	12.0	M7x0.5
P3	ERC-ERX	–	–	9.0	M7x0.5
P4	ERT	6.92 ^{+0.02} ₀	–	–	–
P5	EHP-ELF-ERA-ERE-ERM ERN-FAA-FAN-PES-PFS PLK-PSA-PSG-PSS ¹⁾	7.1	6.4	14.5	–
P6	ABB	9.7	9.0	15.0	–
P7	ABD	12.9	11.7	20.5	–
P8	ANC	16.1	13.7	24.0	–

Note: 1) If these models are used with a tapered washer GBB, the panel cut-out must be according P1.

Recommended mounting nut torque: 1 Nm.