

基本参数：

输入直流电压：DC12~26V

产品名称：T100 智能焊台

产品型号：ATK-PTT100

电源功率：108W

加热功率：72W

产品尺寸：120mm+88mm+38mm（壳体尺寸）

产品重量 370g

控温范围 100~500℃烙铁头对地电阻：<2Ω 手柄线长：1.1m

烙铁头对地电压：<2mV

输入交流电压 AC110~240V



产品名称:

T100智能多功能焊台

产品规格:

主机尺寸: 120mm×88mm×38mm (壳体尺寸)

主机重量: 370g

手柄线长: 1.1m

产品参数:

输入交流电压	AC 100~240V
--------	-------------

输入直流电压	DC 12~26V
--------	-----------

电源功率	108W
------	------

加热功率	72W
------	-----

控温范围	100~500℃
------	----------

烙铁头对地电阻	<2Ω
---------	-----


烙铁头对地电压	<2mV
---------	------

产品参数

产品名称	T100智能多功能焊台
输入交流电压	AC 100~240V
输入直流电压	DC 12~26V
电源功率	108W
加热功率	72W
控温范围	100~500℃
烙铁头对地电阻	<2Ω
烙铁头对地电压	<2mV
主机壳体尺寸	120mm×88mm×38mm
主机重量	370g
手柄线长	1.1m

智能PID控温

ARM32位处理器，分段PID控温: 升温快、控温准、回温快，比传统焊台升温快4倍左右，使用更顺心。

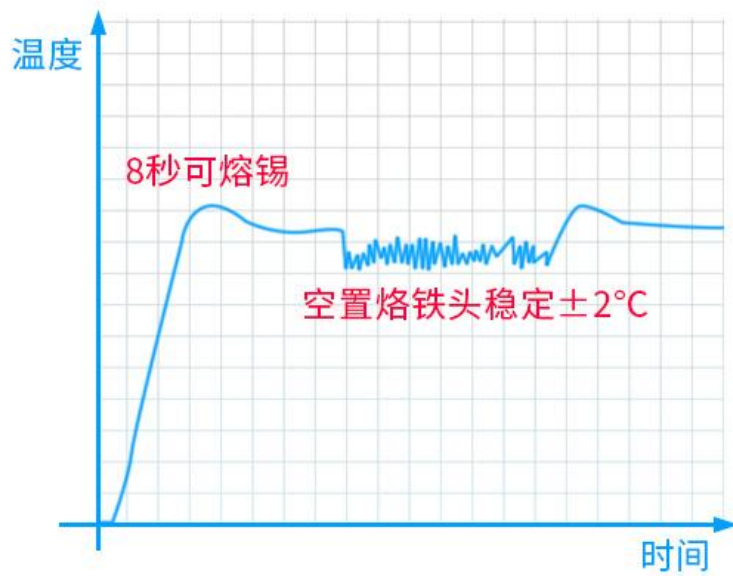

3 使用说明



设定温度：可调范围100~500℃。

使用时间：休眠后自动清零。

加热指示：升温时显示，恒温时闪烁，降温时不显示。

调温旋钮：旋转或单击调节设定温度，双击进入设置菜单。



电源插座：输入交流100~240V。

电池接口：输入直流10~26V。

4 产品实拍





智能多功能焊台

OLED数显/自动休眠/PID控温/回温快



CE和FCC证书

Certificate No. 21EP02054E02		Certificate No. 21EP02054F02	
CERTIFICATE OF CONFORMITY Electromagnetic Compatibility		CERTIFICATE OF CONFORMITY	
This Certificate of Conformity is hereby issued to the product designated below:		This Certificate of Conformity is hereby issued to the product designated below:	
Applicant's name	: Guangzhou Xingyi Electronic Technology Co., Ltd.	Applicant's name	: Guangzhou Xingyi Electronic Technology Co., Ltd.
Address	: 8th Floor, Baiyun Torch Building, No.1 Kesheng Road, Taihe Town, Baiyun District, Guangzhou City, Guangdong Province, China	Address	: 8th Floor, Baiyun Torch Building, No.1 Kesheng Road, Taihe Town, Baiyun District, Guangzhou City, Guangdong Province, China
Manufacture's name	: Same as applicant	Manufacture's name	: Same as applicant
Product Description	: Smart Soldering Station	Product Description	: Smart Soldering Station
Model(s)/Type References	: T100	Model(s)/Type References	: T100
Parameters	: Input: 100-240VAC, 50/60Hz, 72W	Parameters	: Input: 100-240VAC, 50/60Hz, 72W
Standard(s)	: EN 55011, EN 55012, EN IEC 61010-1, EN 61010-2	Standard(s)	: FCC Part 15 Subpart B: 2019, ANSI C63.4a: 2017
Report No.	: EP2102054E02	Report No.	: EP2102054F02
On the basis of the referenced test report(s) and standards harmonized with the directives listed below, the product is deemed to comply with the requirements of the directives. Directives may be relevant to the product. This certificate is issued on the basis of the information provided by the applicant.		The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (Refer to Test Report if any modifications were made for compliance).	
Once compliance with all product relevant CE production control, the manufacturer may indicate the CE mark to products identical to the			
			
Dongguan Pubiao Testing Technology Co., Ltd. No. 3, First Floor, Building A, No.30, Minghua Road, Jiahou Village, Shijie Town, Dongguan City Guangdong China Phone: +86 769 81813515 Fax: +86 769 81813516		Dongguan Pubiao Testing Technology Co., Ltd. No. 3, First Floor, Building A, No.30, Minghua Road, Jiahou Village, Shijie Town, Dongguan City Guangdong China Phone: +86 769 81813515 Fax: +86 769 81813516 E-mail: service@pubiaotest.com Website: www.pubiaotest.com	


优异的交互体验

四向滑屏界面切换，数字编码器控制，显示流畅、控制精准，支持语言设置，各种控制/使用参数可以自由设置，满足个性化使用需求。



智能功耗控制


智能自动休眠、待机、关机功能，大大提升发热芯
寿命、安全又省电。

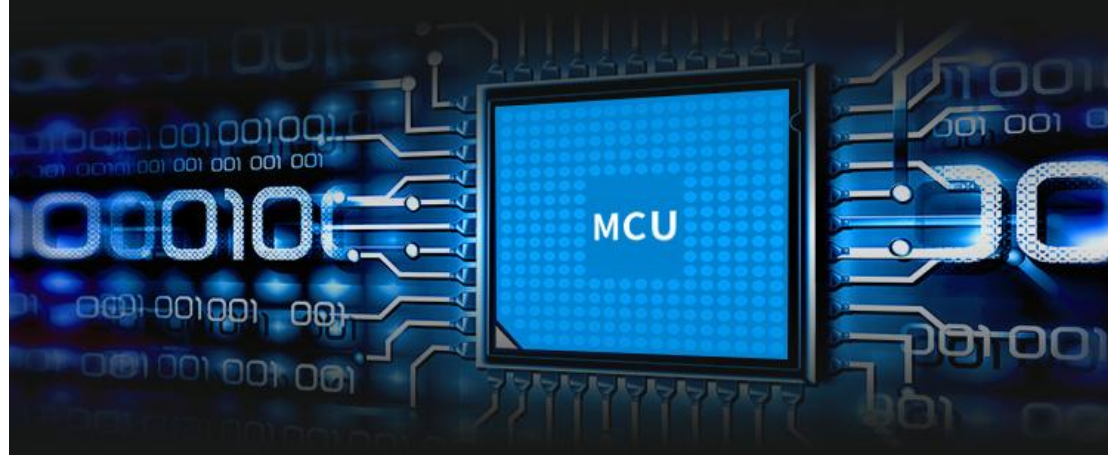

有效降低安全隐患，再也不用怕忘记关焊台了

小巧便携

比传统焊台小四分之一以上，轻三分之一左右

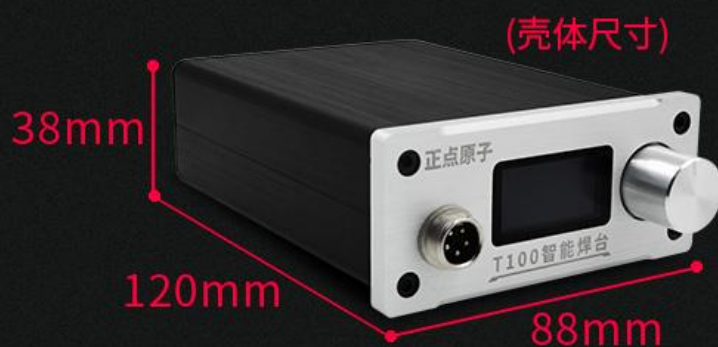

体积小巧配置强大，标配1.3寸OLED显示屏



智能电源管理

支持电池和220V供电，自动切换，智能充电管理，满足不同使用场景需求，出门在外也能大显身手。



①用于室内三芯电源线供电

②用于电池或电源适配器供电，同时支持给外部电池充电，充电电流可调。

黑金刚烙铁头

西安黑金刚烙铁头，头部尺寸精准，高品质寿命长



新的烙铁头第一次使用（注意）：

1. 需先加热至250°C然后上锡，防止干烧氧化！
2. 会出现温度乱跳问题，反复使用几次会稳定！