




PRODUCT NO:		DOSIN-811-1005		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	FIRST ISSUE	W.cheng	2020/09/26	John kine
B	增加一款线长规格	XIEFENG	2022/08/05	

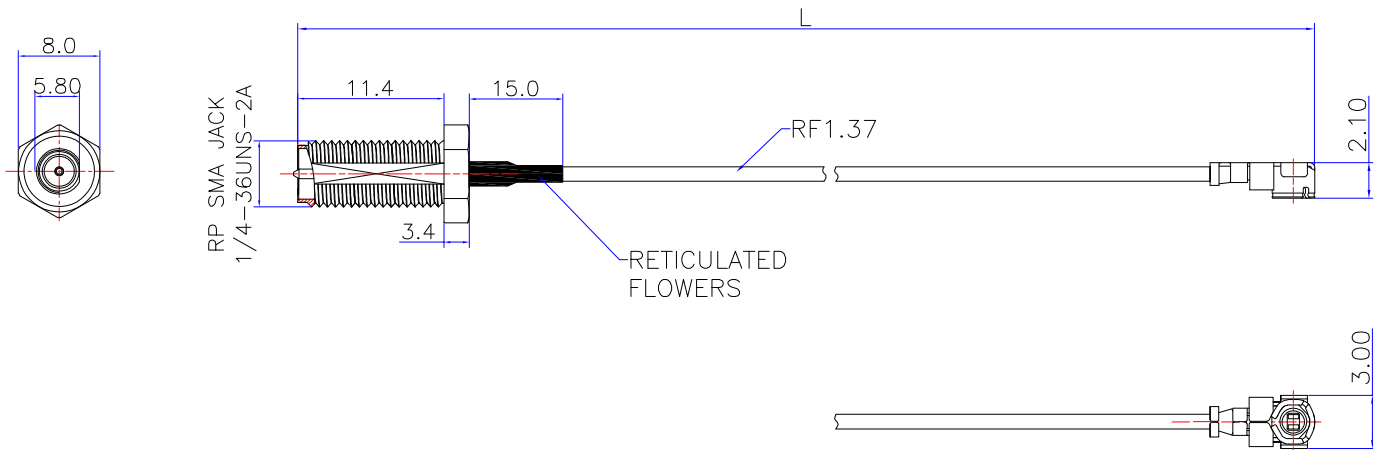

SPECIFICATIONS:

IMPEDANCE: 50 ohms
FREQUENCY RANGE: 0~6GHz
VSWR: 1.5MAX
WITHSTANDING VOLTAGE: 500VRMS
INSULATION RESISTANCE: 5000 megohms
TEMPERATURE RANGE: ≤ -65°C +165°C





TABLE1	
产品料号	L=XXXmm
DOSIN-811-1005	L=150±3mm
DOSIN-811-1005A	L=200±8mm

1	RP SMA JACK	BRASS	GOLD	1
2	CABLE	RF1.37	BLACK	1
3	I-PEX	BRASS	GOLD	1
4	WASHER	BRASS	GOLD	1
5	NUT	BRASS	GOLD	1
6				
7				
8				
9				
10				
NO	COMPONENT NUMBER	MATERIAL	FINISH	QTY

NOTE:	
DRAWN	W.cheng 2020/09/26
CHECKED	
APPROVALS	

TOIERANCE	UNLESS OTHERWISE SPECIFIED TOLERANCES IN INCHES ARE 0.5-8MM±0.20MM 8-30MM±0.40MM 30-120MM±0.50MM
VIEW	
UNIT	MM
SCALE	1 : 1

 DOSIN INDUSTRIAL(HK)CO.,LTD		Web: http://www.dosinconn.com	
东莞市德索五金电子有限公司		dosin2005@dosin-china.com	
		E-mail: dosin2005@163.com	
Dongguan Dosin Hardware Electronics Co.,Ltd.		Tel: (0086)769-81153906	
		Fax: (0086)769-81875836	
NAME: RP SMA JACK TO I-PEX FOR RF1.37 CABLE			
SIZE	PRODUCT NO: DOSIN-811-1005		REV
A			B
DATETIME		CAD FILE	SHEET: 1 OF 1
2020/09/26		H /companydrawings/BD	