

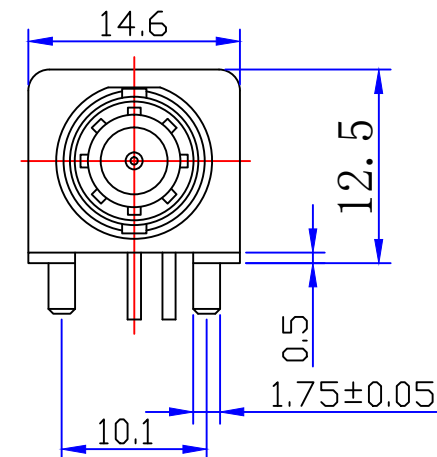


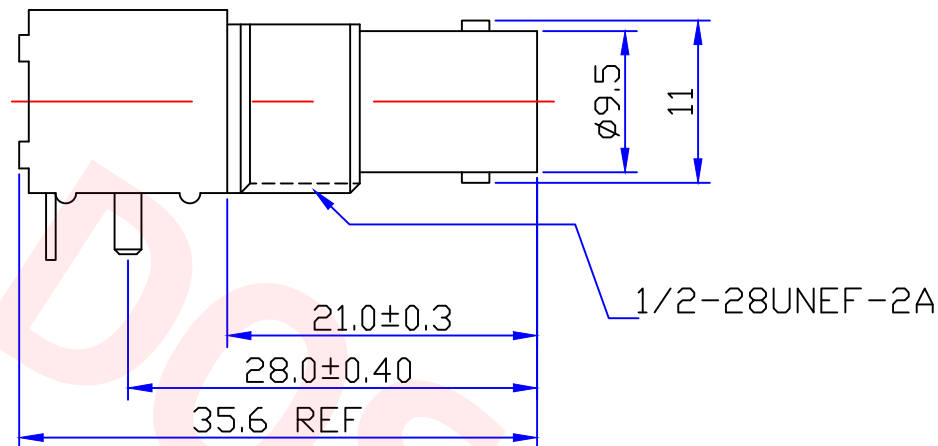

Product NO.		DOSIN-801-0038		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	JIM	2012/11/02	John kine

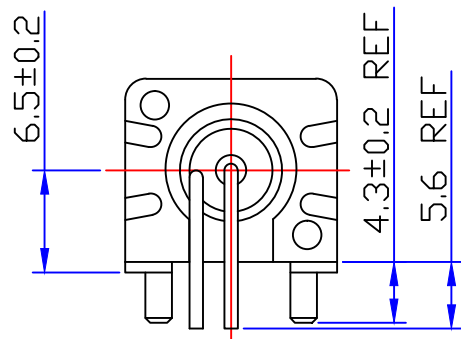

Specifications

Impedance:50 Ohms

Frequency Range:DC~3G

VSWR:1.3MAX



Working Voltage:500V rms @ sea level

Insulation Resistance:5000 Ohms min

Temperature Range:-55℃ TO +155℃

Relative Temperature:≤95%(40° C±2° C)

Drawings products are in line with ROHS standards

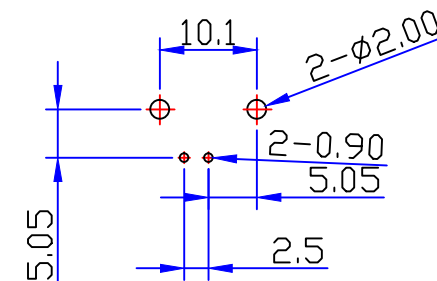

PCB

1	Body	Zinc	NI:80-120u"
2	Center contact	Brass	AU:1u"
3	Lead	Iron	SN
4	Fixed footrest	Iron	NI:80-120u"
5	Insulator	POM	White
6	Fixed mount	ABS	White
7	Washer	Brass	NI:80-120u"
8	Hex nut	Brass	NI:80-120u"
9			
10			
NO	Component Number	Material	Finish

NOTE:

DRAWN
Zelin. Zhang

2012/11/
10

CHECKED


APPROVALS
John

12/04.2012

Tolerance

0-6 ±0.20
6-30 ±0.30
30-120 ±0.5
Angular ±2°

View



UNIT

MM

SCALE

1:1



Dosin Industrial(H.K)Co.Ltd

东莞市德索五金电子制品有限公司

Dosin Hardware Electronics Co.,Ltd

E-mail:dosin2005@163.com
dosin2005@dosing-china.com
Web: http://www.dosing.com
TEL:(0086)769-81153906
FAX:(0086)769-81875836

Name:

BNC WHITE JACK CONNECTOR (12.5MM)

SIZE

Product NO.

DOSIN-801-0038

REV

B

DateTime

2012/11/02

CAD FILE

D/company drawings/BD

SHEET: 1 OF 1